

PERFORMA®

Symphony® g
VOC Compliant

LOW
VOC


\$\$\$

LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content

TOOLS

Visit [CertainTeed.com/Ceilings](https://www.certainteed.com/Ceilings)
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages

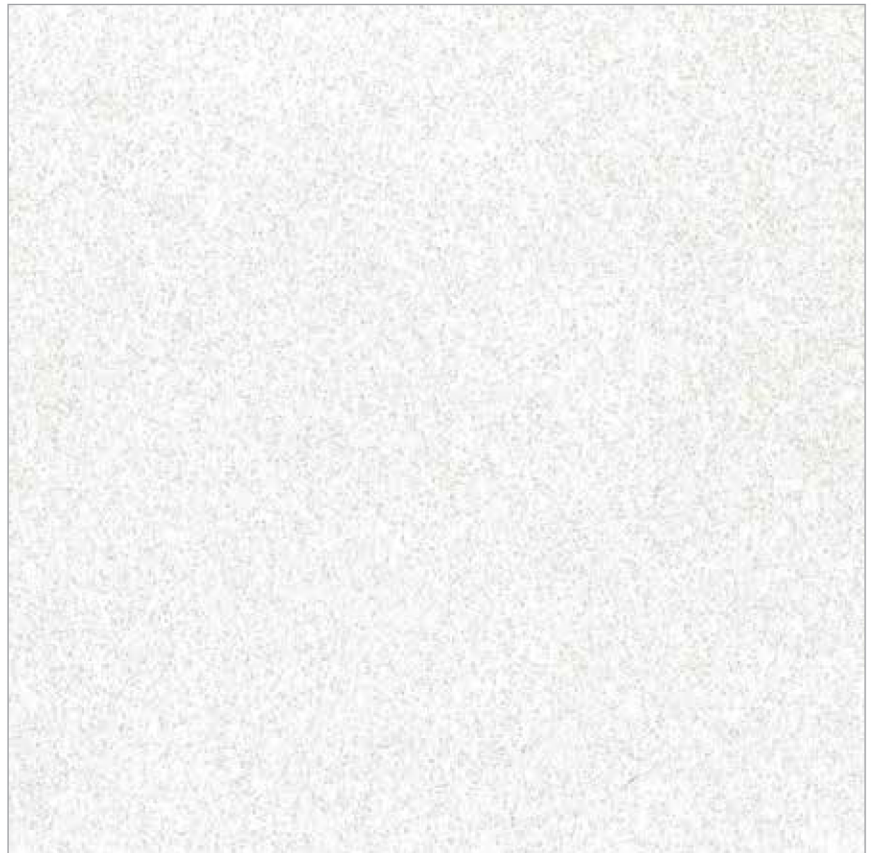

The Symphony line provides a complete line of ultra-durable acoustic solutions with a consistent, smooth ceiling visual. Combine Symphony, Adagio and TufCore products for targeted acoustics within the same space.

FEATURES & BENEFITS

- Gypsum core with reinforced mat face
- High light reflectance enhances conventional lighting, which can reduce fatigue and eye strain
- High CAC blocks unwanted noise from adjoining spaces
- Surface washability exceeds 1,000 cycles with sanitizing chemicals
- Certified VOC compliant
- Alternative to PVC-faced gypsum panels

APPLICATIONS

- Auditoriums
- Offices (with other Symphony Products)
- Closed Plan Areas
- Healthcare (with other Symphony Products)
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS



Trim
15/16 Grid



Symphony® g IOF Trim (1112-IOF-1)

ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	NRC	CAC	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	WASHABLE WITH SANITIZING CHEMICALS	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
SYMPHONY® G												
1112-IOF-1	24 x 24 x 1/2	Trim	—	40	Yes	—	0.90	Yes	Yes	Class A	Certified	0%
1110-IOF-1	24 x 48 x 1/2	Trim	—	42	Yes	—	0.90	Yes	Yes	Class A	Certified	0%

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

Gypsum

ASTM E1264 CLASSIFICATION

Type XX, Pattern E

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California
Department of Public Health CDPH/EHLB/Standard
Method Version 1.1, 2010.

MAINTENANCE

IOF Finish: Clean panel using a sponge/cloth dampened with
water and mild liquid detergent solution. Do not soak panel.
Cleanable with sanitizing chemicals.

WARRANTY

10-year 104/90 Limited Warranty

Technical Support | certainteed.com/ceilings 800-233-8990

© 01/17 CertainTeed Corporation

CertainTeed
SAINT-GOBAIN
Ceilings