

PERFORMA®

Baroque™
VOC Compliant

LOW
VOC

\$\$\$\$



LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance

Recycled Content

● CLASS A Pre: **33%** Post: **0%**
PROTECTONE® Pre: **45%** Post: **0%**

TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages




Carbon Footprint
Reduction
Rapidly Renewable
Resource Content
Recycled Content



EPD Available



HPD Available

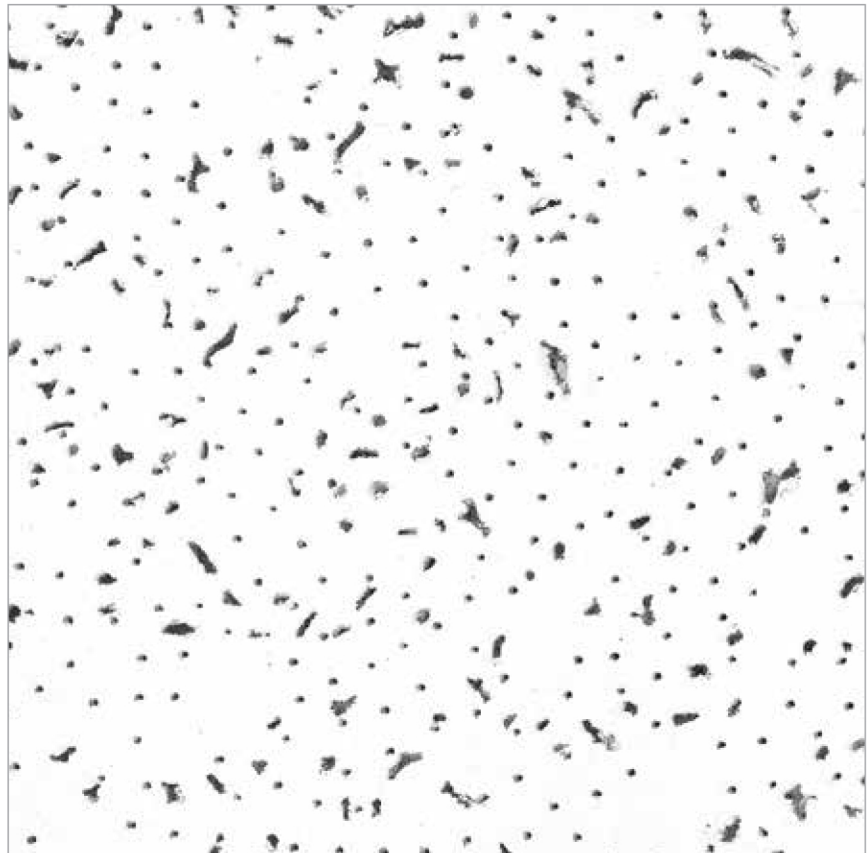

FEATURES & BENEFITS

- 100% non-directional fissured pattern
- Higher sound absorption than comparable products
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Available in fire-rated (Protectone®) version
- Health Product Declaration (HPD) available for this product

APPLICATIONS

- Utility Areas
- Retail Warehouses
- Strip Malls
- Commercial Interior Spaces
- Offices
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS



Trim
15/16 Grid



Reveal
Beveled
15/16 Grid




Narrow Reveal
Corner Bevel
9/16 Grid



Narrow Reveal
Corner Bevel
9/16 Grid Bolt Slot



Narrow Reveal
Corner Bevel
9/16 Grid Tier Drop

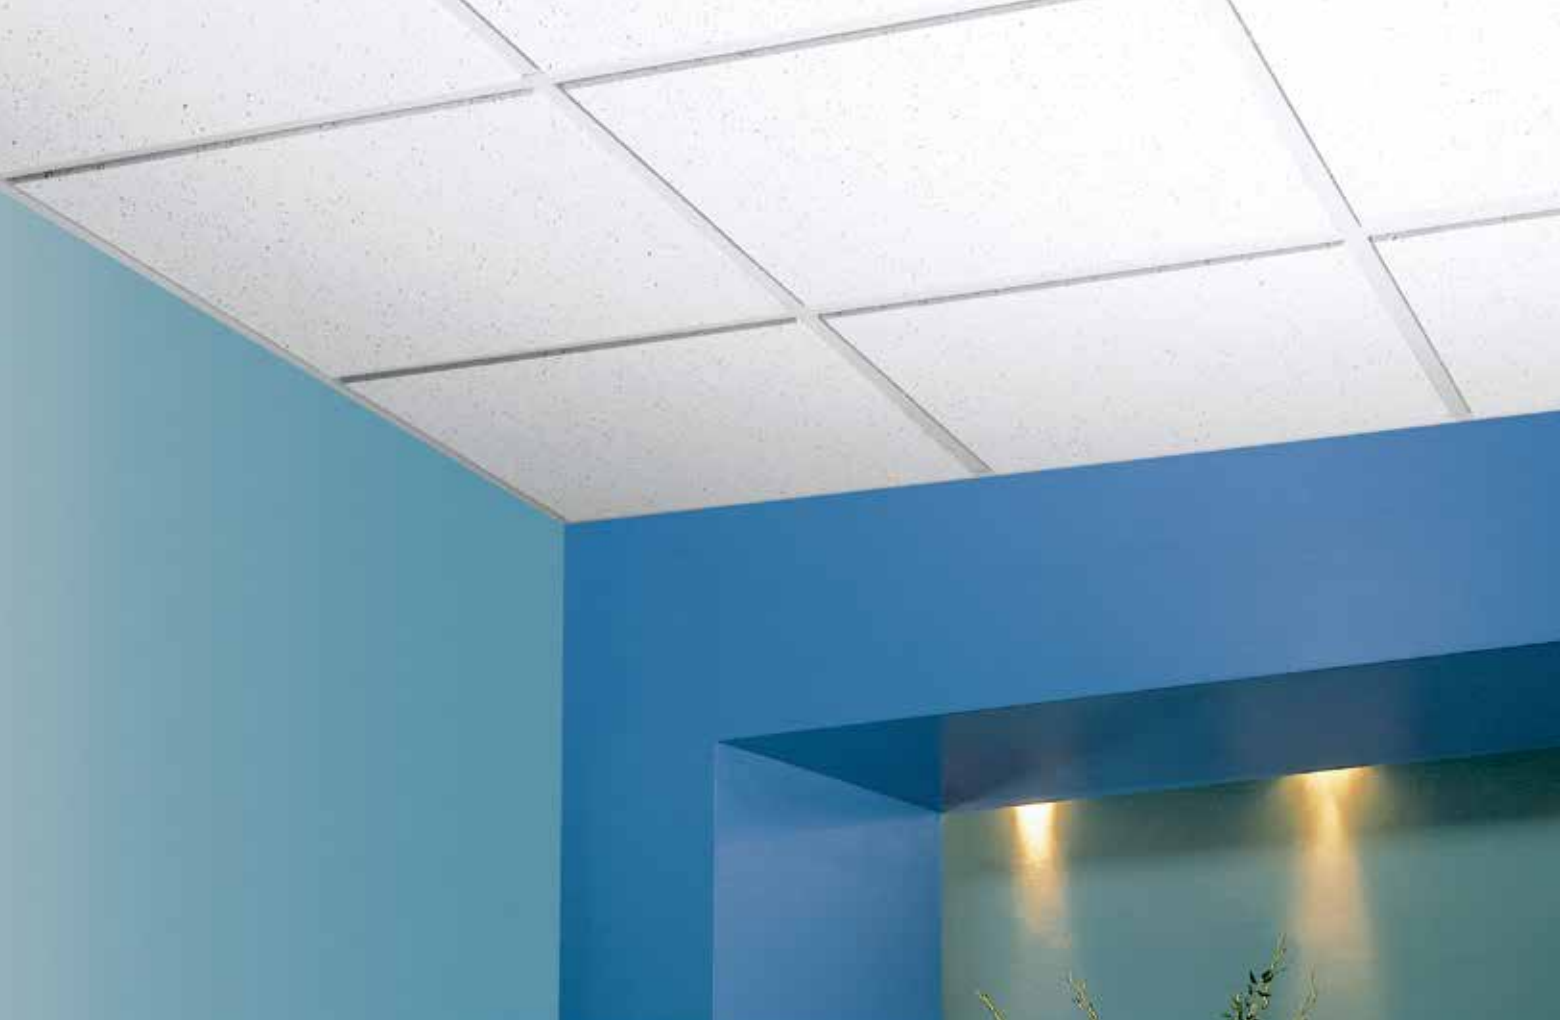

Baroque™ Reveal (BET-154)

ATTRIBUTES

	DIMENSIONS INCHES	EDGE DETAIL	UL CLASSIFIED NRC	CAC	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS ASTM E1264	EMISSION COMPLIANT	RECYCLED CONTENT
BAROQUE™													
BET-157	24 x 24 x 5/8	Trim	0.55	33	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
PBT-157	24 x 24 x 5/8	Trim	0.55	35	Yes	Yes	—	—	0.83	—	Protectone*	Certified	45%
BET-154	24 x 24 x 5/8	Reveal	0.55	33	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
PBT-154	24 x 24 x 5/8	Reveal	0.55	35	Yes	Yes	—	—	0.83	—	Protectone*	Certified	45%
BET-150	24 x 24 x 5/8	Narrow Reveal	0.55	33	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
BET-197	24 x 48 x 5/8	Trim	0.55	35	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
PBT-197	24 x 48 x 5/8	Trim	0.55	40	Yes	Yes	—	—	0.83	—	Protectone*	Certified	45%
BET-194	24 x 48 x 5/8	Reveal	0.55	35	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
BET-2067	20 x 60 x 5/8	Trim	0.55	35	Yes	Yes	—	—	0.83	—	Class A	Certified	33%

BAROQUE™ – METRIC

BET-2067M	(500 x 1500 x 15)	Trim	0.55	35	Yes	Yes	—	—	0.83	—	Class A	Certified	33%
------------------	-------------------	------	------	----	-----	-----	---	---	------	---	---------	-----------	-----

*Protectone®: A fire-resistive ceiling when used in applicable UL assemblies.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL
Mineral Fiber

ASTM E1264 CLASSIFICATION
Type III, Form 2, Pattern C D

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS
Independently certified compliant with California
Department of Public Health CDPH/EHLB/Standard
Method Version 1.1, 2010.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY
1-year Limited Warranty